

# Low Frequency Solar Inverter

## PV3600 PRO Series (8KW-12KW)




### Features

- Smart LCD setting(Working modes, Charge Current, Charge voltage, etc.)
- Built-in MPPT solar charge controller 100A/200A
- MPPT efficiency max 98%
- Powerful charge rate up to 140Amp
- Inside BMS function
- DC start & Automatic Self-Diagnostic Function
- WIFI / USB monitoring function (wi-fi optional)
- Supporting AGS, BTS port
- Compatible to generator


### Introduction

PV3600 PRO series is a multi-function inverter ,combining functions of inverter and MPPT solar charger controller, solar charger and battery charger to offer uninterruptible power support. The comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and selectable input voltage based on different applications.

### Back panel printing description

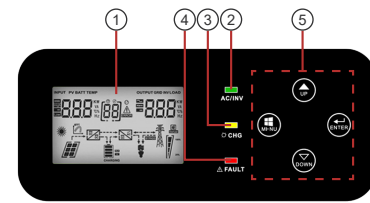


1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons

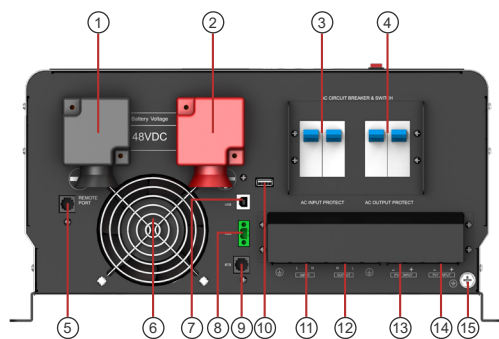

1. BAT-
2. BAT+
3. AC input breaker
4. AC output breaker
5. Remote control port
6. Fan
7. USB port
8. AGS port
9. BTS port
10. Wifi communication port
11. AC input
12. AC output
13. PV2 input
14. PV1 input
15. Ground

### Solar system connection

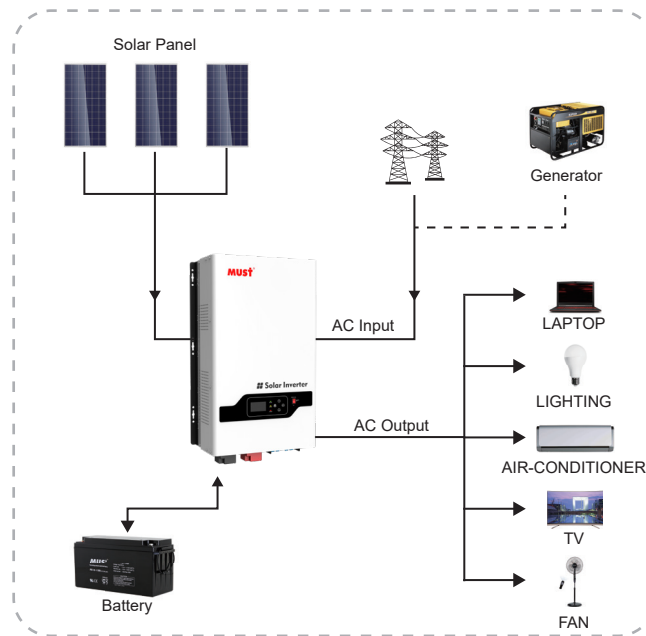

### Specification

MODEL	PV36 PRO-8K	PV36 PRO-10K	PV36 PRO-12K	
Nominal Battery System Voltage	48VDC	48VDC	48VDC	
INVERTER OUTPUT	Rated power	8.0KW	10.0KW	12.0KW
	Surge rating	24000VA	30000VA	36000VA
	Capable of starting electric motor	4HP	5HP	6HP
	Waveform	Pure sine wave / same as input (bypass mode)		
	Nominal output voltage RMS	220V / 230V / 240VAC (±10%RMS)		
	Output frequency	50Hz / 60Hz ± 0.3Hz		
	Inverter efficiency(peak)	>88%		
	Line mode efficiency	>95%		
	Power factor	1.0		
	Typical transfer time	20ms(max)		
AC INPUT	Voltage	230VAC		
	Selectable voltage range	90-280 VAC (APL)		
	Frequency range	50Hz / 60Hz		
BATTERY	Low battery voltage cutoff	40-48VDC for 48VDC mode		
	Low battery voltage recover	42-50VDC for 48VDC mode		
	High battery voltage cutoff	60VDC for 48VDC mode		
	High battery voltage recover	57VDC for 48VDC mode		
	Idle consumption-search mode	<80W when power saver on		
AC CHARGER	Output voltage	Depends on battery type		
	Charger AC input breaker rating	80A	100A	100A
	Overcharge protection S.D.	62.8VDC for 48VDC mode		
	Maximum charge current	100A	120A	140A
BTS	Continuous output power	Yes Variances in charging voltage & S.D. voltage base on the battery temperature		
BYPASS & PROTECTION	Input voltage waveform	Sine wave (grid or generator)		
	Nominal input frequency	50Hz or 60Hz		
	Overload protection (SMPS Load)	Circuit breaker		
	Output short circuit protection	Circuit breaker		
	Bypass breaker rating	80A	100A	100A
Max bypass current	36A	45A	54.5A	
SOLAR CHARGER	Maximum PV charge current	100A(200A optional)		
	DC voltage	48V		
	Maximim PV array power	5000W(10000W for 200A optional)		
	MPPT range @ operating voltage(VDC)	64~235VDC		
	Maximum PV array open circuit voltage	250VDC		
	Maximum efficiency	>98%		
	Standby power consumption	<2W		
MECHANICAL SPECIFICATIONS	Mounting	Wall mount		
	Dimensions (W*H*D)	674*402*222mm		
	Package Dimensions (W*H*D)	/		
OTHER	Operation temperature range	0°C to 40°C		
	Storage temperature	-15°C to 60°C		
	Audible noise	60dB MAX		
	Display	LED+LCD		
	Loading (20GP/40GP/40HQ)	140pcs / 280pcs / 320pcs		