


MPPT Solar Charge Controller (245V)
PC1800F Series (60A/80A/100A)




Features

- LCD display , easy to operate on LCD screen
- Multi stage charging (3-stage charging , parallel charging and equalized charging function)
- Maximum Solar Input Voltage: 245V
- BTS – Battery remote temperature sensor terminal
- Enable to charge Li-thium, Gel , lead-acid battery
- With RS485 & USB communication port
- Protection: PV array short circuit, PV reverse polarity, Battery reverse polarity, Over charging, Output short circuit


Introduction

MPPT (Maximum Power Point Tracking) Solar Charge Controller offer an efficient, safe, multi-stage recharging process that prolongs battery life and assures peak performance from a solar array. Each Charge Controller allows customized battery recharging.


Back panel printing description

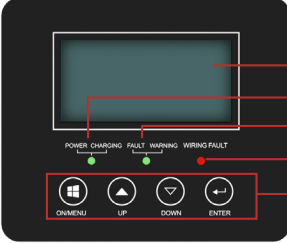

1. LCD display
2. Power ON/Charging indicator
3. Fault and warning indicator
4. Wiring fault indicator
5. Operation button

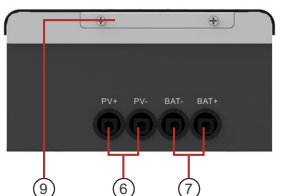


[PC18-8015F]

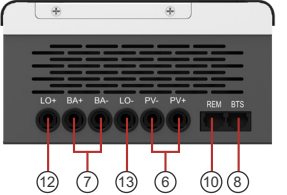

[PC18-10015F]

6. PV connectors
7. Battery connectors
8. Battery temperature sensor terminal
9. Wiring box cover
10. RS485 communication port
11. USB
12. The load positive terminal
13. The load negative terminal

Solar system connection

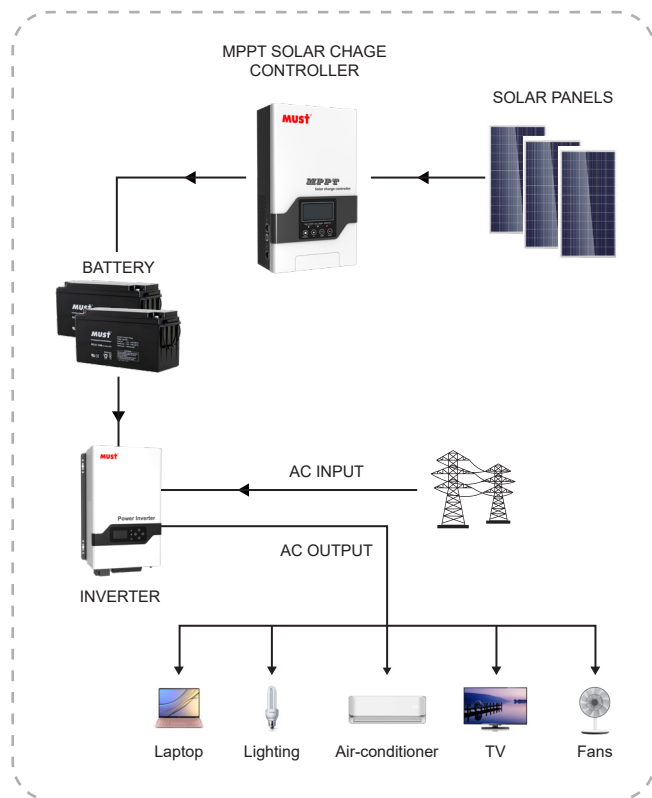

Specification

MODEL		PC18-6025F	PC18-8025F	PC18-10025F
Nominal Battery System Voltage		12V / 24V / 48VDC (Auto detection); 36V (Setting)		
CONTROLLER INPUT	Battery Voltage	12V / 24V / 36V / 48V		
	Maximum Solar Input Voltage	12V (VBAT)	100V	
		24V (VBAT)	245V	
		36V (VBAT)	245V	
		48V (VBAT)	245V	
	PV Array MPPT Voltage Range	12V (VBAT)	15-95V	
		24V (VBAT)	30~230V	
		36V (VBAT)	45~230V	
		48V (VBAT)	60~230V	
	Maximum Input Power	12V (VBAT)	940W	1250W
24V (VBAT)		1880W	2500W	3120W
36V (VBAT)		2820W	3750W	4680W
48V (VBAT)		3760W	5000W	6250W
BATTERY	Charging Set Points	Flooded Battery	Absorption Stage: 14.2V / 28.4V / 42.6V / 56.8V	
		Float Stage: 13.7V / 27.4V / 41.1V / 54.8V		
	AGM (Default)	Absorption Stage: 14.4V / 28.8V / 43.2V / 57.6V		
		Float Stage: 13.7V / 27.4V / 41.1V / 54.8V		
	Over-charging Voltage	15.5V / 30.0V / 45.0V / 60.0V		
	Over-charging Comeback Voltage	14.5V / 29.5V / 44.5V / 59.0V		
	Battery Defect Voltage	10.0V / 17.0V / 25.5V / 34.0V		
	Temperature Compensation Coefficient	-5mv / °C / cell (25°C vef)		
	Peak Conversion Efficiency	98% (MPPT Efficiency 99%)		
	Maximum Battery Current	60A	80A	100A
Maximum DC load current	/	/	100A	
Max Charging Current	60amps continuous @ 40°C ambient	80amps continuous @ 40°C ambient	100amps continuous @ 40°C ambient	
DISPLAY & PROTECTION	Protections	Solar high voltage disconnect/ Solar high voltage reconnect/ Battery high voltage disconnect Battery high voltage reconnect/ High temperature disconnect/ High temperature reconnect		
	MECHANICAL SPECIFICATIONS		Machine Dimension (W*H*D): 306.6*163.6*94.9mm	284*165*97mm
		Package Dimension (W*H*D): /	/	
		G.W: 3kg	/	
		N.W: /	/	
OTHER	Mounting	Wall mount		
	Environmental Rating	Indoor		
	Enclosure	IP20		
	Radiating Mode	Fan cooling		
	Operation Temperature Range	-10~55°C		
	Ambient Humidity	0~90% relative humidity (non-condensing)		
Altitude	≤3000m			

The technical specifications of this document are subject to change without any notice