


The MUST HBP3000 Series is with a ground-breaking LiFePO4 battery pack 6.4kwh or 12.8kwh energy storage, pure sine wave solar inverter inbuilt. Versatile energy storage system as your home strong back up, reliable access to power sources anytime. This class-leading power station brings you the power to run your daily consumes, family camping trip, cabin workshops, or even whole house for a day or two days power back up depending on your demands.



## SOLAR INVERTER WITH LITHIUM BATTERY SOLUTION **HBP3000 SERIES**

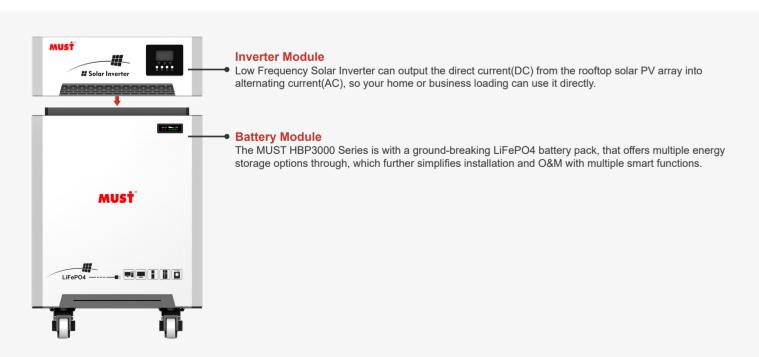

## **Specifications**

MODEL		HBP30-1524	HBP30-2024	HBP30-3024	HBP30-5048	HBP30-6048	
Inverter	Rated power		1500	2000W	3000W	5000W	6000W
	Output voltage waveform		Pure sine wave				
	Output voltage regulation		220V/230V/240V ±10%				
	Output frequency		50Hz or 60Hz (±0.2Hz)				
	Peak efficiency		88%				
	Nominal DC input voltage		24Vdc			48Vdc	
	Standby Consumption		< 2W				
PV Input	Max solar power input		2500W			5000W	
	PV max charging current		80A				
	Combined charging current		80A				
	Max efficiency		98% max				
	PV array open circuit voltage		145V				
	PV Array MPPT Voltage Range		32~130VDC			64~130VDC	
AC Input	AC input voltage		230Vac ±5%				
	Acceptable input voltage range		155~280VAC(For personal computers)				
	Nominal input frequency		50Hz / 60Hz (Auto detection)				
	Transfer time		10ms(max)				
AC Charge	Charging current @ Nominal input voltage		25A	30A	40A	35A	40A
	Charging Algorithm		4-step (Li)				
Output	AC output	Terminal & Socket (10A max)					
Lithium Battery	Energy		6400wh			12800wh	
	Nominal voltage		25.6V			51.2V	
	Battery capacity		250Ah				
	Standard charging and discharge current		100A				
	Maximum continuous charging & discharge current		100A				
	Operation ambient temperature	Charge	-10~50°C				
		Discharge			-20~55°C		


RST port ADS port DRY port

CAN port

RS485 communication port

RS232 communication port ON/OFF indicator

## **Pic of Input & Output Port**

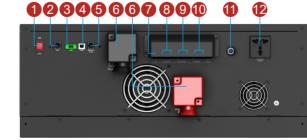

- BTS

  - AGS
- USB Remote port
- 8. AC input AC output 10. PV input

GND

- Battery input 11. Charger input protect

  - 12. AC output (socket 10A max)

The technical specifications of this document are subject to change without any notice